

09/13/00



jc912 U.S. PTO

09-15-00

PATENT APPLICATION

TRANSMITTAL FOR U.S. PATENT APPLICATION  
UNDER 37 CFR §1.53(b)jc759 U.S. PTO  
09/660733

09/13/00

Box Patent Application  
ASSISTANT COMMISSIONER  
FOR PATENTS  
Washington, D.C. 20231Attorney's Docket  
004578.1073  
Express Mail Receipt:  
EL501028511US

Sir:


Transmitted herewith for filing is the original patent application of:

Inventor: James S. Wilson, et al.

For: METHOD AND APPARATUS FOR TEMPERATURE GRADIENT  
CONTROL IN AN ELECTRONIC SYSTEMEnclosed are: Specification, Claims and Abstract (36 Total Pages)  
Declaration and Power of Attorney  
6 Sheets of Formal Drawings  
Assignment, with Recordation Cover Sheet  
Check - \$ 762.00 (Filing Fee)  
Check - \$ 40.00 (Assignment Recording Fee)  
Acknowledgment Post Card

| FEE CALCULATION    |        |       |                 |                      | FEE                    |
|--------------------|--------|-------|-----------------|----------------------|------------------------|
|                    | Number |       | Number<br>Extra | Large Entity<br>Rate | Basic Fee<br>\$ 690.00 |
| Total Claims:      | 24     | -20 = | 4               | X \$18 =             | \$ 72.00               |
| Independent Claims | 3      | - 3 = | 0               | X \$78 =             | \$ -0-                 |
| TOTAL FILING FEE = |        |       |                 |                      | \$ 762.00              |

The enclosed checks cover the filing fee of \$762.00, and the Assignment recording fee of \$40.00. Please credit any overpayment, or charge any other fee required by this paper, to Deposit Account No. 02-0384 of Baker Botts L.L.P. A duplicate copy of this sheet is enclosed.

September 13, 2000  
Date  
T. Murray Smith  
Attorney for Applicant  
Registration No. 30,222

Attorney Docket: 004578.1073

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: James S. Wilson, et al.  
Date Filed: September 13, 2000  
Application No.: Unknown  
Title: METHOD AND APPARATUS FOR  
TEMPERATURE GRADIENT CONTROL IN  
AN ELECTRONIC SYSTEM

Assistant Commissioner  
for Patents  
Washington, D.C. 20231

Dear Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

I hereby certify that the enclosed documents (listed below) are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on this 13th day of September, 2000, addressed to Assistant Commissioner for Patents, Washington, D.C. 20231.

*Willie Tiles*

Encl: Application Transmittal Form  
Specification, Claims and Abstract (36 pages)  
Formal Drawings (6 Sheets)  
Declaration and Power of Attorney  
Assignment and Assignment Cover Sheet  
Checks (\$762.00 and \$40.00)  
Acknowledgment Post Card

Express Mail Label No.  
No. EL501028511US

1

METHOD AND APPARATUS FOR TEMPERATURE  
GRADIENT CONTROL IN AN ELECTRONIC SYSTEM

TECHNICAL FIELD OF THE INVENTION

The present invention relates generally to temperature control of a device and, more particularly, to a method and apparatus for controlling temperature gradients across components of an electronic system.

5

BACKGROUND OF THE INVENTION

The design of electronic packages and systems must address electrically generated heat dissipation within operating devices to ensure proper operation. For example, most electronic devices must be maintained below predetermined maximum temperatures to allow acceptable performance and reliability. With regard to microwave electronic systems (e.g. power amplifiers, phase shifters, low noise amplifiers), electronic components may also be sensitive to temperature gradients between associated electronics devices, for example monolithic microwave integrated circuits (MMICs). Such components must be maintained within predetermined maximum temperature gradients from device to device.

Accordingly, cooling systems are typically incorporated into such electronic systems. Cooling systems are configured to absorb heat and lower the temperature of the electronic system generally, and resist excessive temperature gradients between particular devices of the electronic package. A typical cooling system often includes a metal cold plate coupled with electronic devices. Oftentimes, the cold plate contains brazed-on finstock to increase the heat transfer surface area. This solution is very expensive and requires a complicated design and fabrication procedure for the cold plate.

Another approach utilizes a liquid coolant routed through channels embedded in the cold plate, in order to accommodate heat transfer from the electronic devices to the liquid coolant. This eliminates the need for expensive finstock brazing. However, the power, density

and sensitivity of today's electronic packages has limited the efficiency and practicality of this approach.

One example of the foregoing type of system is a phased array antenna system. Phased array antenna systems are used in a wide variety of applications and often include electronics systems with integral cooling systems. In a phased array antenna system it is desirable that the antenna system be relatively small in volume and relatively light in weight. Antenna systems of this type often include MMICs, which generate a substantial amount of heat during operation. As the frequency of antenna operation increases, there is an increase in the amount of heat which is emitted by these circuits, which in turn can affect temperature gradients across the array.

In particular, in a phased array antenna system, the existence of temperature gradients across the array can produce phase errors, which affect the accuracy of the antenna system. The higher the frequency of antenna operation, the smaller the permissible temperature gradients across the array. For example, where the phased array is operating at a frequency of about 5 GHz, the maximum allowable temperature gradient across the array is about 20°C. In contrast, when the array is operating at a frequency of about 80 GHz, the maximum allowable temperature gradient across the array is only about 1.3°C. Thus, it is important to have an efficient cooling system, so that a substantially uniform temperature is maintained across the array.

As a further complication, many electronic systems have a limited supply of coolant available for the cooling system. For example, various different cooling systems on an aircraft often share a common cooling system, and a particular system's access to the coolant is limited. The performance of such systems often suffer from low coolant flow rates which provide limited heat transfer ability. Furthermore, low volumetric flow rates result in a significant temperature rise in the coolant as it flows from an inlet to an outlet of a cold plate. Rising coolant temperatures result in undesirably large temperature gradients between various portions of the electronic system.

In order to overcome this, complex fluid manifolds have been designed in order to allow each device to be cooled with only its proportional amount of coolant, in a completely parallel distribution. However, this approach is bulky and fundamentally less efficient from a heat transfer standpoint because of the low fluid coolant velocity.

SUMMARY OF THE INVENTION

From the foregoing, it will be appreciated that a need has arisen for a method and apparatus for cooling an apparatus in a manner which accurately controls temperature gradients. According to the present invention, a method and apparatus are provided to meet this need.

In accordance with one form of the present invention, a thermally conductive part has a fluid passageway formed therein. Turbulence inducing structure is disposed along the fluid passageway in a manner selected to achieve a predetermined temperature profile along the passageway in material of the part adjacent to the fluid passageway, in response to fluid flow through the fluid passageway.

In accordance with another form of the present invention a thermally conductive flat plate has a fluid passageway formed therein. Turbulence inducing structures are disposed along the fluid passageway.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention and its advantages, reference is now made to the following description, taken in conjunction with the accompanying drawings, in which:

FIGURE 1 is a diagrammatic perspective view of a phased array antenna system which embodies the present invention;

FIGURE 2 is a diagrammatic perspective view of an apparatus which is part of the system of FIGURE 1, which includes an electronic system and a slat assembly, and which embodies the present invention;

FIGURE 3 is a diagrammatic perspective view, with portions broken away, of the slat assembly of FIGURE 2, having cooling loops disposed therein;

FIGURE 4 is a diagrammatic sectional view of the slat assembly of FIGURE 3, taken along the line 4-4 in FIGURE 3;

FIGURE 5 is a diagrammatic sectional view of the slat assembly of FIGURE 3, taken along the line 5-5 in FIGURE 3;

FIGURE 6 is a diagrammatic plan view of one of the cooling loops of FIGURE 3;

FIGURE 7 is a diagrammatic plan view of an alternative embodiment of the cooling loop of FIGURE 5, which is suitable for use with the slat assembly of FIGURE 4;

FIGURE 8 is a diagrammatic plan view of a cooling loop according to yet another embodiment of the present invention;

FIGURE 9 is a diagrammatic perspective view of part of yet another alternative embodiment of a cooling loop;



FIGURE 10 is a diagrammatic perspective view of part of a cooling loop according to another embodiment of the present invention;

5      FIGURE 11 is a diagrammatic perspective view of part of a cooling loop according to still another embodiment of the present invention; and

10      FIGURE 12 is a diagrammatic cross section taken through an apparatus which is an alternative embodiment of the apparatus of FIGURE 2, and which embodies aspects of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

FIGURE 1 is a diagrammatic perspective view of a phased array antenna system 10, including an antenna unit 12, server or devices 30 and a central control unit 16. Antenna unit 12 is coupled with devices 30, each of which is coupled with central control unit 16. Antenna unit 12 includes an array of dipoles 18 which are patch elements that include the capability to transmit and receive electromagnetic signals. Device 30 each include circuitry elements 20. Each circuitry element 20 is electrically coupled with an associated dipole 18. During operation of antenna system 10, central control unit 16 collects signals received by circuitry elements 20 from dipoles 18, and varies transmit signals fed from circuitry elements 20 to dipoles 18 so that beams originating from dipoles 18 can be formed in space and steered very rapidly in azimuth and elevation. The exemplary embodiment disclosed in FIGURE 1 is an antenna system of the type commonly known as an active phased array antenna system.

In the embodiment of FIGURE 1, circuitry elements 20 are transmit/receive (T/R) modules and contain monolithic microwave integrated circuits (MMICs) 38. T/R modules 20 process signals travelling to and from each of antenna unit 12 and central control unit 16. MMICs 38 generate a substantial amount of heat while antenna system 10 is operating. Accordingly, each device 30 includes an associated cooling system operable to remove heat generated by T/R modules 20 and MMICs 38, as discussed later.

Antenna system 10 relies on discreet, specified variations in the phase angle of signals sent from T/R

modules 20 to dipoles 18, in order to precisely control the direction of the outgoing beams, and ensure accurate analysis of incoming beams. T/R modules 20 each introduce into signals passing therethrough a phase shift, which varies with temperature. For proper operation of the system, T/R modules 20 all need to be at approximately the same temperature, so that they all add about the same phase shift to each of the respective signals passing through them, which in turn will cause the unwanted additional phase shifts to all be roughly equal. The permissible temperature difference or gradient between any two T/R modules 20 decreases progressively as the operating frequency progressively increases. Excessive temperature gradients between any two or more T/R modules 20 will introduce significant different phase shifts into the associated signals and adversely affect the beams. Therefore, the cooling system is designed to remove heat from the device 30 in a manner which maintains an approximately isothermal temperature profile across T/R modules 20.

FIGURE 2 is a diagrammatic perspective view of one of the devices 30, which includes an electronic system and which embodies aspects of the present invention. Transmit/receive (T/R) modules 20 of device 30 are mounted on a slat assembly 34 having a plurality of slats 36 extending therefrom. The material of the slat assembly 34 is an aluminum silicon carbide (AlSiC) metal matrix composite. The modules 20 and circuits 38 are mounted on slat assembly 34 using a silver epoxy adhesive, which has good thermal conductivity. This type of adhesive is more rigid than some other available adhesives, but as discussed below the present invention

provides effective temperature control which substantially avoids thermal expansion and contraction that would stress the adhesive due to differing coefficients of thermal expansion of the slat assembly and the circuit components.

Each T/R module 20 contains an associated MMIC 38. The device 30 has at least one not-illustrated power interface, through which power is provided to the device 30, and thus to the T/R modules 20. Mounting brackets 40 are provided to mechanically secure the device 30 in place within the antenna system 10. An integrated logic interface 42 receives commands from the control unit shown at 16 in FIGURE 1, which defines the operation of each T/R module 20. Radio Frequency (RF) interfaces 44 are used to electrically couple device 30 with the phased array antenna unit shown at 12 in FIGURE 1.

Coolant interfaces 46 each include a respective inlet 48 and outlet 50, which form a portion of a cooling system integral to slat assembly 34. Inlets 48 and outlets 50 may be coupled with an external cooling system, or any fluid supply device which provides a continuous flow of a thermally conductive fluid. The cooling system disposed within slat assembly 34 will be described in more detail with regard to FIGURE 3.

FIGURE 3 is a diagrammatic perspective view, with portions broken away for clarity, of the device 30 of FIGURE 2. In the illustrated embodiment, slat assembly 34 operates as a cold plate, to provide cooling to various electronic components 20 and 38 of device 30. Slat assembly 34 includes two integral cooling loops 52. Cooling loops 52 are formed within slat assembly 34 by embedding 1/8" stainless steel tubing within slat

assembly 34, during fabrication of slat assembly 34. The location and configuration of cooling loops 52 are illustrated in FIGURE 3 in broken lines.

5 The central openings through cooling loops 52 define continuous fluid passageways 54 within slat assembly 34. Fluid passageways 54 form paths of fluid communication between inlets 48 and outlets 50. Accordingly, cooling loops 52 may be coupled, using the interfaces 46, with external cooling systems 51 to provide fluid coolant to 10 each inlet 48. The coolant travels from each inlet 48 through passageway 54 to the corresponding outlet 50. A complete coolant loop is thereby formed allowing a continuous flow of fluid coolant to be provided through each cooling loop 52. The fluid coolant traveling 15 through cooling loop 52 absorbs thermal energy generated by electronic components 20 and 38 of device 30. The amount of fluid provided for cooling is dictated by pressure drop and system capacity criteria. The high density packaging requirements of an active phased array antenna result in small volumes for cooling tubes which lead to reduced flow rates. The reduced flow rates then result in increased temperature rise in the fluid from inlet 48 to outlet 50. 20

25 T/R modules 20 and MMICs 38 (FIGURE 2) are high power electronics components which dissipate a substantial amount of heat during operation. Slat assembly 34 includes thermally conductive materials which absorb heat generated by T/R modules 20 and MMICs 38. Thus, fluid coolant flowing through fluid passageways 54 30 absorbs heat from slat assembly 34 in order to maintain electronic components 20 and 38 within a predetermined temperature range.

The operating temperature of device 30 is critical to its operation for a number of reasons. For example, each T/R module 20 is very sensitive to temperature and operates most efficiently within a predetermined temperature range. Therefore, each cooling loop 52 is used to maintain modules 20 within a range which allows for the efficient operation of each T/R module 20.

Further, as discussed above, the T/R modules on the slat assembly add unwanted phase shifts to signals passing therethrough, and the amount of phase shift varies with temperature. Therefore, the temperature gradient between any T/R module 20 and any other T/R modules 20 must remain within a predetermined range of values. The allowable temperature gradient between any two T/R modules is based in part upon the operating frequency. For example, where T/R modules 20 are operating at a frequency of approximately 5 GHz, the maximum allowable temperature gradient across the array is approximately 20°C. In contrast, when operating is at a frequency of approximately 80 GHz, the maximum allowable temperature gradient across the array is approximately 1.3°C. The ideal temperature gradient between any two T/R modules 20 is equal to zero.

Accordingly, cooling loops 52 are configured to provide fluid coolant to portions of slat assembly 34 which absorb the most heat from T/R modules 20. By maintaining the temperature of slat assembly 34 generally constant throughout, excessive temperature gradients between any two T/R modules 20 are avoided. In other words, in order to maintain pairs of T/R modules 20 within predetermined temperature gradients, the

temperature profile across slat assembly 34 must also be within a predetermined temperature range.

Therefore, cooling loops 52 are designed and configured to accomplish at least two goals: maintain electronics system 30 within a predetermined temperature range, and accomplish heat transfer between T/R modules 20 and the fluid coolant in a manner which prevents any two T/R modules 20 from exceeding a predetermined maximum temperature gradient.

As illustrated in FIGURE 3, cooling loops 52 are approximately identical in size and configuration. Each cooling loop 52 conforms to an oval configuration. In practice, cooling loops 52 may alternatively be provided in any geometric configuration(s) which include one or more continuous fluid passageways 54 between respective inlets 48 and outlets 50. Additional design criteria regarding the size and configuration of cooling loops 52 will be discussed later in more detail.

Furthermore, the number of cooling loops 52 provided within a given slat assembly 34 may be significantly varied within the teachings of the present invention. In the embodiment of FIGURE 3, two cooling loops 52 are provided. In another embodiment, a single cooling loop extending across the approximate area covered by cooling loops 52 of FIGURE 3 may be used in lieu of two cooling loops 52. In still another embodiment, three or more cooling loops, each having an independent inlet and outlet, may be provided within slat assembly 34.

FIGURE 4 is a diagrammatic, sectional view taken along line 4-4 of FIGURE 3. The cross sectional shape of each cooling loop illustrated in FIGURE 4 conforms to an oval configuration. In the illustrated embodiment, this

configuration is achieved by deforming the stainless steel tubing used to form cooling loops 52. Cooling loops 52, which are initially round, are each compressed at an upper portion 58 and a lower portion 60 so as to flatten it slightly to decrease its dimension between 58 and 60. This allows each cooling loop 52 to fit more easily within thickness 64 of slat assembly 34. Stated differently, it permits the slat assembly 34 to be thinner. The size of the antenna elements 18 (FIGURE 1) and the spacing between them both decrease progressively as the operating frequency is progressively increased. Since the slat assemblies are aligned with respective rows of antenna elements, the slat assemblies must be thinner for higher frequencies. A further advantage of the oval shape is that a particular size of tubing which may accommodate a higher volume of fluid coolant through cooling loops 52 may be selected, relative to the volume of flow available from round tubing having an equal thickness. However, in other embodiments, the cross-section of cooling loops 52 may conform to virtually any geometric configuration which will accommodate the flow of fluid coolant therethrough.

FIGURE 5 is a diagrammatic sectional view taken along line 5-5 of FIGURE 3, showing a portion of a cooling loop 52.

Cooling loops 52 include a plurality of constrictions 62. Constrictions 62 include reduced diameter portions of fluid passageways 54, which partially obstruct the path of fluid communication through fluid passageways 54. Constrictions 62 induce turbulence into the flow of fluid coolant through



passageway 54 in order to avoid laminar flow characteristics of coolant through passageways 54.

Laminar flow through a circular tube is well understood theoretically for predicting pressure drop and heat transfer. Laminar flow is the result of low Reynolds number internal flows. Low Reynolds number flows through fluid passageways 54 may result from low flow rates of fluid coolant, and/or the use of high viscosity fluid coolant. For laminar flow, the velocity distribution of fluid transversely across a circular passageway is generally parabolic. The velocity of fluid coolant at the center of the fluid passageway is approximately twice the average velocity of fluid coolant. The velocity of fluid coolant closest to the wall of the fluid passageway approaches zero. Therefore, nearly stagnant fluid coolant nearest a surface 55 of the fluid passageway remains at a higher temperature than fluid coolant nearest a longitudinal centerline 66 of the fluid passageway. The higher temperature is a result of heat transfer from the wall to the fluid. In the illustrated embodiment, the surface 55 of fluid passageway 54 is the interior wall of the tubing which forms fluid passageway 54.

By inducing turbulent flow characteristics into the flow of fluid coolant through fluid passageway 54, a more uniform temperature distribution between the fluid coolant at the longitudinal centerline 66 and the fluid coolant nearest the surface of the fluid passageway is achieved. In other words, the temperature gradient throughout the cross-sectional area of the fluid passageway approaches zero. Accordingly, fluid coolant nearest the surface 55 of the fluid passageway 54 will

attain lower temperatures for turbulent flow than laminar flow. This is because the turbulence mixes the fluid and thus produces throughout the fluid an approximately average temperature which is lower near surface 55 than is the case for laminar flow. Therefore, a more efficient cooling system is achieved, since cooler fluid coolant adjacent surfaces 55 will absorb more heat from portions of slat assembly 34 adjacent surface 55. The induced turbulence reduces the temperature gradient in the fluid near the tube surface 55 resulting in increased heat transfer for a given difference in temperatures between the fluid and the tube surface 55.

In the illustrated embodiment, fluid coolant enters inlet 48 at a predetermined temperature and continuously absorbs heat from portions of slat assembly 34 adjacent to fluid passageway 54. Therefore, the temperature of the fluid coolant continually rises as it flows through the passageway. Since the temperature of the fluid coolant is continually rising as it travels through fluid passageway 54, the ability of the fluid coolant to absorb heat from slat assembly 34 is diminished as the fluid coolant travels through fluid passageway 54, in the absence of turbulence. The diminished ability to remove heat results in locally increased temperatures in the assembly 34.

Constrictions 62 induce turbulence within the flow of fluid coolant through fluid passageways 54 by disrupting the boundary layer associated with laminar type flows. As fluid coolant travels through fluid passageway 54, fluid coolant closest to the surface of fluid passageway 54 is disrupted when it encounters constrictions 62. Accordingly, the fluid coolant closest

to the surface of fluid passageway 54 is deflected toward the centerline 66 of fluid passageway 54. This deflection of fluid causes a mixing of fluid within fluid passageway 54, or induced turbulence.

5 Since turbulence causes a more uniform distribution of fluid coolant temperature within fluid passageway 54, the temperature of fluid coolant close to the surface of fluid passageway 54 will remain lower than that of fluid coolant close to the surface of a comparable fluid  
10 passageway exhibiting laminar flow characteristics. Accordingly, the efficiency of cooling provided by fluid coolant through passageway 54 is increased, since the cooler fluid coolant close to the surface of fluid passageway 54 will absorb more heat from adjacent  
15 portions of slat assembly 34 than would be absorbed for laminar flow.

In FIGURE 5, each constriction 62 is longitudinally spaced along fluid passageway 54 from adjacent  
20 constrictions 62. The longitudinal distances 68 and 84-86 between adjacent constrictions 62 varies along the length of fluid passageway 54, between inlet 48 and outlet 50. The specific configuration of constrictions 62 within fluid passageway 54, and its advantages, are illustrated and discussed in more detail with regard to  
25 FIGURE 6.

FIGURE 6 is a diagrammatic plan view of cooling loop 52. Cooling loop 52 includes inlet 48, outlet 50, and fluid passageway 54 formed between inlet 48 and outlet 50. In FIGURE 6, the distances 68-86 between adjacent  
30 constrictions 62 generally decrease as the distance from inlet 48 increases, with the shortest distance between adjacent constrictions occurring closest to outlet 50.

However, the distances 69 and 81 are generally longer than adjacent distances 70-72 and 78-80, respectively. This is due in part to the presence of elbows 90 and 92. Elbows 90 and 92 tend to induce turbulence into the flow therethrough due to their configuration. Therefore, constrictions 62 need not be disposed within portions of passageway 54 within and immediately adjacent elbows 90 and 92.

The distances 68-73 occur between adjacent constrictions 62 nearest the inlet 48, along passageway 54. The distances 74-86 occur between constrictions 62 nearest outlet 50, along passageway 54. Since the distances 68-86 generally decrease along passageway 54 from inlet 48 to outlet 50, the average of the distances 68-73 is greater than the average of the distances 74-86. Accordingly, the amount of turbulence induced within coolant flow through fluid passageway 54 progressively increases as the temperature of the coolant travelling through passageway 54 progressively increases. This causes the fluid to absorb heat at approximately the same rate all along the passageway, as discussed below.

Due to the configuration and heat output of T/R modules 20 (FIGURE 2), the amount of heat to be absorbed by fluid coolant from portions of slat assembly 34 adjacent to fluid passageway 54 is approximately constant along the length of fluid passageway 54. The variable decreasing distance between adjacent constrictions maintains a minimum temperature gradient across portions of slat assembly 34 which are adjacent to fluid passageway 54. Appropriate selection of the spacing between respective constrictions 62 allows heat transfer characteristics of the cooling system to be tailored to

achieve a nearly isothermal surface temperature on portions of slat assembly 34 adjacent cooling loop 52.

In order to maintain an approximately isothermal temperature profile across all T/R modules 20 (FIGURE 2), slat assembly 34 must remain at an approximately uniform temperature. In order to accomplish this, it is desirable to have the fluid coolant absorb heat from adjacent portions of slat assembly 34 at a constant rate along passageway 34. Since the temperature of the fluid coolant is rising as it travels through passageway 54, the temperature difference between the slat assembly and the fluid coolant decreases, which tends to decrease the rate at which the fluid coolant can absorb heat. By inducing progressively greater amounts of turbulence, the fluid coolant is able to continue to absorb heat at the desired rate, even though the fluid coolant is heating up.

In another embodiment, constrictions may be located based upon their proximity to various heat sources. For example, constrictions may be concentrated in areas adjacent to sections of slat assembly 34 which absorb the most heat from adjacent T/R modules. In other words, multiple, densely spaced constrictions may be located directly adjacent to larger and/or closely spaced T/R modules 20.

In order to maintain T/R modules 20 of FIGURE 2 within predetermined temperature gradients with one another, constrictions 62 are provided in a manner so that the spacing between adjacent constrictions is smallest near the outlet, where temperatures of the fluid coolant are the highest. Accordingly, turbulent mixing of the fluid coolant increases in frequency as the

temperature of the fluid coolant rises. In this manner, the temperature of the fluid coolant closest to the surface of fluid passageway 54 remains more uniform along the surface of fluid passageway 54. In other words, even though the temperature of the fluid coolant is continually rising, the temperature of the fluid coolant closest to the surface of fluid passageway 54 remains within a predetermined temperature range.

Accordingly, the teachings of the present invention are used to simultaneously control the operating temperature, heat transfer rate and temperature gradient between various components. In the illustrated embodiment, the temperature of the stainless steel tubing which forms fluid passageway 54 may be maintained within a 2°C variation from inlet 48 to outlet 50, during operation of apparatus 30.

FIGURE 7 is a diagrammatic plan view of a cooling loop 152 which is an alternative embodiment of the cooling loop 52. Cooling loop 152 includes an inlet 148, an outlet 150 and tubing which extends from inlet 148 to outlet 150. A plurality of constrictions 162 are provided in cooling loop 152, in order to induce turbulence within fluid coolant travelling through fluid passageway 154. In the embodiment of FIGURE 7, constrictions 162 are approximately equally spaced from adjacent constrictions, along the length of the tubing. In other words, the distance between adjacent constrictions remains approximately constant from inlet 148 to outlet 150. The distance between constrictions 162 adjacent elbows 190 and 192 are greater, however, for those reasons previously discussed with regard to FIGURE 5.

There are several reasons to provide a cooling loop 152 with approximately equal distances between adjacent constrictions 162 along the tubing. In one embodiment, cooling loop 152 will provide more efficient cooling to an associated component than a cooling loop without constrictions. Since turbulence induced within fluid passageway 154 will cause mixing of fluid coolant within fluid passageway 154, constrictions 162 will provide lower temperatures of fluid coolant nearest the surface of fluid passageway 154. This allows cooling loop 152 to absorb more heat from adjacent components than is possible with a cooling loop without constrictions.

Similarly, approximately equal distances between adjacent constrictions 162 are provided where more heat generating components are located adjacent the portions of fluid passageway 154 near inlet 148 than the portions of fluid passageway 154 near outlet 150. Maximum heat transfer is required in portions of fluid passageway 154 closest to inlet 148. Therefore, the increase in fluid coolant temperature as the fluid coolant approaches outlet 150 is not a problem, since less heat transfer is required within the portion of fluid passageway 154 closest to outlet 150.

FIGURE 8 is a diagrammatic plan view of a cooling loop 252 which is a further alternative embodiment of the cooling loop 52, incorporating aspects of the present invention. Cooling loop 252 includes an inlet 248, an outlet 250 and serpentine tubing extending from inlet 248 to outlet 250. The tubing provides a path of fluid communication for a fluid coolant, between inlet 248 and outlet 250. A plurality of dimples 262 are formed upon the tubing which form protrusions within a fluid

passageway within the tubing. Dimples 262 induce turbulence within fluid coolant flowing through the passageway, similar to constrictions 62 discussed with regard to FIGURES 5-6.

5 Dimples 262 are configured upon cooling loop 252 to provide increased turbulence within the flow of fluid coolant through the passageway, at locations where the most heat transfer will be required between cooling loop 252 and adjacent heat generating components. In other  
10 words, if the tubing will extend adjacent to a device which generates relatively high amounts of thermal energy, several dimples 262 may be provided very closely at that location upon cooling loop 252. Similarly, the tubing may be configured such that portions of the tubing pass directly underneath and/or immediately adjacent the  
15 areas where the most heat transfer will be required. For example, the tubing includes regions 256 and 258 having a large number of closely spaced dimples 262. Cooling loop 252 is configured such that regions 256 and 258 occur  
20 immediately adjacent electronic components which emit substantial thermal energy.

The configuration of cooling loop 252 may also correspond to the density of heat generating devices in adjacent equipment. For example, in the embodiment  
25 illustrated in FIGURE 8, cooling loop 252 includes a larger volume of tubing concentrated at a lower portion 264 of cooling loop 252. In this embodiment, electronics or other heat generating devices may be concentrated upon equipment closest to lower portion 264. Conversely,  
30 upper portion 266 of cooling loop 252 includes less volume of tubing than lower portion 264. In this embodiment, a smaller amount of heat may be generated



from equipment adjacent upper portion 266 than equipment adjacent lower portion 264.

The specific location of dimples 262 may be selected according to empirical data collected during the operation of a system incorporating cooling loop 252. In another embodiment, computational fluid dynamic studies may be used to predict the most efficient size and configuration of dimples.

Various turbulence inducing structures are available for use within the teachings of the present invention. For example, each of constrictions 62 and dimples 262 induce turbulence within their respective passageways 54 and 254. In practice, any structure which cooperates with fluid passageway 254 in order to induce turbulence into the flow of fluid coolant through the fluid passageway may fall within the teachings of the present invention. Several examples are discussed with regard to FIGURES 9-11, below.

FIGURE 9 is a diagrammatic perspective view of a section of tubing 100, having a fluid passageway 102 disposed therethrough. A plurality of dimples 104 extend from a surface 106 of fluid passageway 102 toward a central, longitudinal axis 108 of fluid passageway 102. Dimples 104 induce turbulence into a flow of fluid coolant through passageway 102.

Dimples 104 of FIGURE 9 conform to a generally notched configuration and may be formed by applying pressure to surface 106 with a pointed instrument, in order to deform tubing 100. In one embodiment, tubing 100 may be 1/8" stainless steel tubing. Stainless steel tubing is malleable enough to deform using pliers or another appropriate tool, yet strong enough to withstand

the excessive temperature and pressure associated with the manufacturing process used to form slat assembly 34 (FIGURE 2).

FIGURE 10 is a diagrammatic perspective view of a section of tubing 200 which is an alternative embodiment of the tubing 100, and which embodies teachings of the present invention. Tubing 200 includes a fluid passageway 202 formed therethrough. A plurality of crimps 204 are formed upon tubing 200 which partially obstruct fluid passageway 202, in order to induce turbulence within fluid flow through fluid passageway 202. In this embodiment, each crimp 204 extends inwardly from a surface 206 of tubing 200, toward a longitudinal centerline 208. Each crimp 204 has a corresponding, diametrically opposed crimp 204 of a similar configuration. Crimps 204 of FIGURE 10 may be formed by "crimping" tubing 200 at various locations along its length.

FIGURE 11 is a diagrammatic perspective view of a section of tubing 300 which is a further alternative embodiment of the tubing 100 and which embodies aspects of the present invention. Tubing 300 has a generally oval, cross-sectional shape. In practice, tubing 300 may be formed by compressing round tubing. Alternatively, tubing having an oval, cross-sectional shape may be manufactured for use within the teachings of the present invention. An oval tubing configuration may be desirable where the fluid passageway therethrough 302 must be provided with a limited thickness. This situation may occur when fluid passageway 302 will be formed within a very thin slat assembly. The oval cross section of fluid

passageway 302 allows greater volume of fluid coolant to travel through a thin profile slat assembly.

All other things being relatively equal, tubing having a round cross section will generally be stronger than tubing having an oval cross section. However, oval tubing will accommodate a larger volume of fluid through a space with a limited thickness. Accordingly, the design of fluid passageway 302 should take this tradeoff into account.

A plurality of constrictions 304 extend from a surface 306 of tubing 300 toward a central axis 308 of tubing 300. Constrictions 304 form continuous annular rings which each extend along a perimeter of passageway 302, in a plane approximately perpendicular to the longitudinal axis 308 of passageway 302. As previously discussed with respect to FIGURE 5, constrictions 304 are provided in order to induce turbulence into the flow of a fluid through fluid passageway 302.

FIGURE 12 is a diagrammatic, cross sectional view of a system 430, in accordance with an alternative embodiment of the present invention. System 430 includes a plurality of heat generating devices 431 and 432 coupled with a thermally conductive plate 434. A fluid passageway 454 extends through portions of plate 434. Fluid passageway 454 forms a path of fluid communication between an inlet and an outlet of fluid passageway 454.

A plurality of turbulence inducing structures 462 are disposed within fluid passageway 454, and extend from a surface 455 of fluid passageway 454 toward a central axis 453 of fluid passageway 454. As previously illustrated and described, turbulence inducing structures

462 generate turbulent flow in response to a flow of fluid through fluid passageway 454.

Fluid passageway 454 is configured to provide relatively higher heat transfer to particular portions of plate 434. For example, heat generating devices 432 are greater in number and more densely grouped than heat generating devices 431. Therefore, a relatively greater amount of heat will be absorbed by plate 434 at those areas adjacent to heat generating devices 432.

Fluid passageway 454 includes a central portion 458 which forms an angle  $\theta$  with respect to an imaginary horizontal axis 459. Accordingly, fluid passageway 454 is relatively closer to heat generating devices 432 than to heat generating devices 431. Therefore, heat transfer between fluid coolant and heat generating devices 432 will take place more efficiently than with heat generating devices 431. Also, the configuration of central portion 458 will induce turbulent flow characteristics into the flow of fluid through fluid passageway 454, since fluid passageway 454 is not configured as a straight, circular pipe.

In the embodiment of FIGURES 1-6, slat assembly 34 is formed from aluminum silicon carbide having stainless steel tubing embedded therein. Various other materials may be used for slat assembly 34 and/or cooling loop 52 within the teachings of the present invention. For example, various thermally conductive materials are available to form slat assembly 34.

Slat assembly 34 provides cooling to device 30, and also provides structural support for T/R modules 20. Therefore, the selection of material for forming slat assembly 34 should include these considerations. In

other embodiments, material used to form slat assembly 34 may include various ceramics, cermets, copper infiltrated graphite, powdered metallurgy or other thermally conductive engineered composite materials.

5 Similarly, various thermally conductive materials are available for embedding within slat assembly 34 to form fluid passageway 54. Stainless steel provides many benefits because of its strength, high melting point, cost and availability. In the illustrated embodiment,  
10 the formation of slat assembly 34 requires very high temperatures and pressures. These criteria may be considered in selecting an appropriate material to embed within slat assembly 34 to form fluid passageway 54. However, copper, other metals and/or composite materials  
15 may be embedded within slat assembly 34 in order to form fluid passageway 54.

In an alternative embodiment of the present invention, the fluid passageway may be formed without the use of embedded tubing. For example, the fluid  
20 passageway may be formed as a void within a slat assembly during the fabrication process, using a die-cast or other cavity forming procedure. Alternatively, the fluid passageway may be formed within any given structure by drilling, grinding or some other boring procedure.

25 Various fluid coolants are available for use within the teachings of the present inventions. In the illustrated embodiments, polyalphaolifin (PAO) is used. However, other dielectric oils or ethylene glycol/water mixtures may be used within the teachings of the present  
30 invention.

The present invention provides a number of technical advantages. One such advantage results from use of

turbulence inducing structures within a fluid passageway which induce turbulence in response to the flow of a fluid through the passageway. Turbulent flow characteristics have many advantages over laminar flow characteristics. For example, when a coolant fluid travels through a fluid passageway and turbulence is induced, a mixing occurs between the fluid nearest the central axis of the fluid passageway and the fluid nearest the surface of the fluid passageway. Accordingly, the fluid temperature nearest the surface of the fluid passageway is reduced which allows the coolant to absorb heat from adjacent components more efficiently.

Another technical advantage results from the use of different spacing between adjacent turbulence inducing structures along the fluid passageway. By varying the spacing between adjacent structures, turbulent flow may be introduced in a precise and accurate manner, to locations of a cooling system where a relatively large heat transfer is desirable. Accordingly, the specific number, size, configuration and location of structures may be selected to achieve a predetermined temperature profile across portions of a thermally conductive part adjacent the fluid passageway.

Yet another technical advantage results from use of progressively decreasing distances between adjacent turbulence inducing structures as the distance from an inlet of the fluid passageway increases. Since fluid coolant travelling through a passageway will inherently increase in temperature, more turbulence will typically be required at portions of the fluid passageway furthest from the inlet. In this manner, turbulent flow characteristics are progressively increased along the

passageway to allow greater heat transfer from the coolant, as the temperature of the fluid increases.

Still another technical advantage of the present invention includes the determination of a specific  
5 configuration of the fluid passageway and the associated turbulence inducing structures, so as to provide a heat transfer profile which corresponds to the heat generating and absorption characteristics of adjacent thermally conductive parts. Accordingly, the temperature gradient  
10 between various components of a heat generating system may be maintained within a predetermined range of values.

Although several embodiments of the present invention have been illustrated and described in detail, it should be understood that various substitutions and  
15 alterations can be made thereto within departing from the scope of the invention. For example, the disclosed embodiments refer to a fluid passageway formed within a cold plate associated with an electronics system. The teachings of the present invention may be used in cooling and/or maintaining a predetermined maximum temperature  
20 gradient value in any discreet electronics components packaged at high densities, which require cooling. In fact, the teachings of the present invention may be incorporated into any fluid passageway in which locally  
25 increased turbulent flow characteristics are desired. Further, although the disclosed embodiments are intended to minimize temperature gradients within an apparatus, the present invention is equally suitable for maintaining a selective temperature difference between two points in  
30 an apparatus.

Although the present invention has been described in  
several embodiments, a myriad of changes and  
modifications will be apparent to one skilled in the art,  
and it is intended that the present invention encompass  
5 such changes and modifications as fall within the scope  
of the present appended claims.



WHAT IS CLAIMED IS:

1. An apparatus, comprising:

a thermally conductive part having a fluid  
passageway formed therein; and

5 turbulence inducing structure disposed along said  
passageway in a manner selected to achieve a  
predetermined temperature profile along said passageway  
in material of said part adjacent to said fluid  
passageway, in response to fluid flow through said fluid  
10 passageway.

2. An apparatus according to Claim 1, wherein said  
structure includes protrusions extending from a surface of  
said fluid passageway toward a longitudinal, central axis  
15 of said fluid passageway.

3. An apparatus according to Claim 1, wherein said  
structure includes first and second protrusions extending  
inwardly from a surface of said passageway, said first  
protrusion being generally opposite said second protrusion  
20 along a perimeter of said passageway in a plane  
approximately perpendicular to a longitudinal axis of said  
passageway.

25 4. An apparatus according to Claim 1, wherein said  
structure includes a inwardly projecting annular  
protrusion formed along a perimeter of said passageway in  
a plane approximately perpendicular to a longitudinal axis  
of said passageway.

5        5.    An apparatus according to Claim 1, wherein said structure includes a plurality of portions which each induce turbulence, wherein said portions are longitudinally spaced along said passageway from adjacent said portions, and longitudinal distances between adjacent said portions vary along said passageway.

10       6.    An apparatus according to Claim 1, wherein said structure includes a plurality of portions which each induce turbulence, wherein said fluid passageway includes a first section and a second section, and wherein first distances between adjacent said portions along said first section are greater than second distances between adjacent said portions along said second section.

15       7.    An apparatus according to Claim 1, wherein said part includes a cold plate.

20       8.    An apparatus according to Claim 7, wherein said cold plate includes aluminum silicon carbide (AlSiC).

25       9.    An apparatus according to Claim 7, wherein said part includes tubing at least partially embedded within said cold plate, said tubing having a generally oval cross section, and wherein said passageway extends through said tubing.

      10.   An apparatus according to Claim 9, wherein said tubing includes stainless steel.

11. An apparatus according to Claim 9, wherein said structure includes crimps formed upon said tubing, said crimps extending toward a longitudinal, central axis of said passageway.

12. An apparatus according to Claim 9, wherein said structure includes dimples formed upon said tubing, said dimples extending toward a longitudinal axis of said passageway.

13. An apparatus according to Claim 9, further comprising a fluid supply device in fluid communication with said passageway for causing a thermally conductive fluid to flow through said passageway.

14. An apparatus according to Claim 13, further comprising a plurality of electronic components thermally coupled with said part, said components generating heat which is transferred to said fluid through said part.

15. An apparatus according to Claim 14, further comprising a phased array antenna system which includes said part, said structure, and said electronic components.

16. An apparatus according to Claim 14, wherein said temperature profile is approximately isothermal.

17. An apparatus, comprising:

a thermally conductive flat plate having a fluid passageway formed therein; and

a plurality of turbulence inducing structures  
5 disposed along said fluid passageway.

18. An apparatus according to Claim 17, wherein  
said structures are longitudinally spaced along said  
passageway from adjacent said structures, and longitudinal  
10 distances between adjacent structures vary along said  
passageway.

19. An apparatus according to Claim 17, wherein  
locations of said structures are selected to achieve a  
15 predetermined temperature profile along said passageway in  
material of said plate adjacent to said fluid passageway,  
in response to fluid flow through said fluid passageway.

20. An apparatus according to Claim 17, wherein  
20 said structures each include an annular inward protrusion.

21. An apparatus according to Claim 17, further  
comprising a plurality of electronic devices coupled with  
a first face of said plate.

22. A method of maintaining a predetermined temperature profile along material of a thermally conductive part adjacent a fluid passageway formed within said part, comprising:

5 providing turbulence inducing structure within said fluid passageway; and

selecting a configuration of said structure to achieve a predetermined temperature profile along said passageway in material of said part adjacent to said fluid passageway, in response to fluid flow through said fluid passageway.

23. A method according to Claim 22, further comprising:

15 configuring said structure to include a plurality of portions which each induce turbulence;

spacing said portions longitudinally from adjacent said portions along said passageway; and

selecting locations of said portions such that longitudinal distances between adjacent said portions vary along said passageway.

24. A method according to Claim 22, further comprising configuring said structure to include a plurality of portions which each induce turbulence and selecting locations of said portions such that first longitudinal distances between adjacent said portions along a first section of said passageway are greater than second longitudinal distances between adjacent said portions along a second section of said passageway.

METHOD AND SYSTEM FOR TEMPERATURE  
GRADIENT CONTROL IN AN ELECTRONICS SYSTEM

ABSTRACT OF THE DISCLOSURE

An apparatus includes a plurality of Transmit/Receive (T/R) modules (20) coupled with a slat assembly (34). The slat assembly includes a fluid passageway (54). A plurality of turbulence inducing structures (62, 162, 262, 104, 204, 304, 462) are disposed within the fluid passageway. In one embodiment, the turbulence inducing structures includes constrictions (62) extending from a surface (55) of the fluid passageway. The location and configuration of the structures is selected to achieve a predetermined temperature profile along the passageway, in response to fluid flow through the fluid passageway.

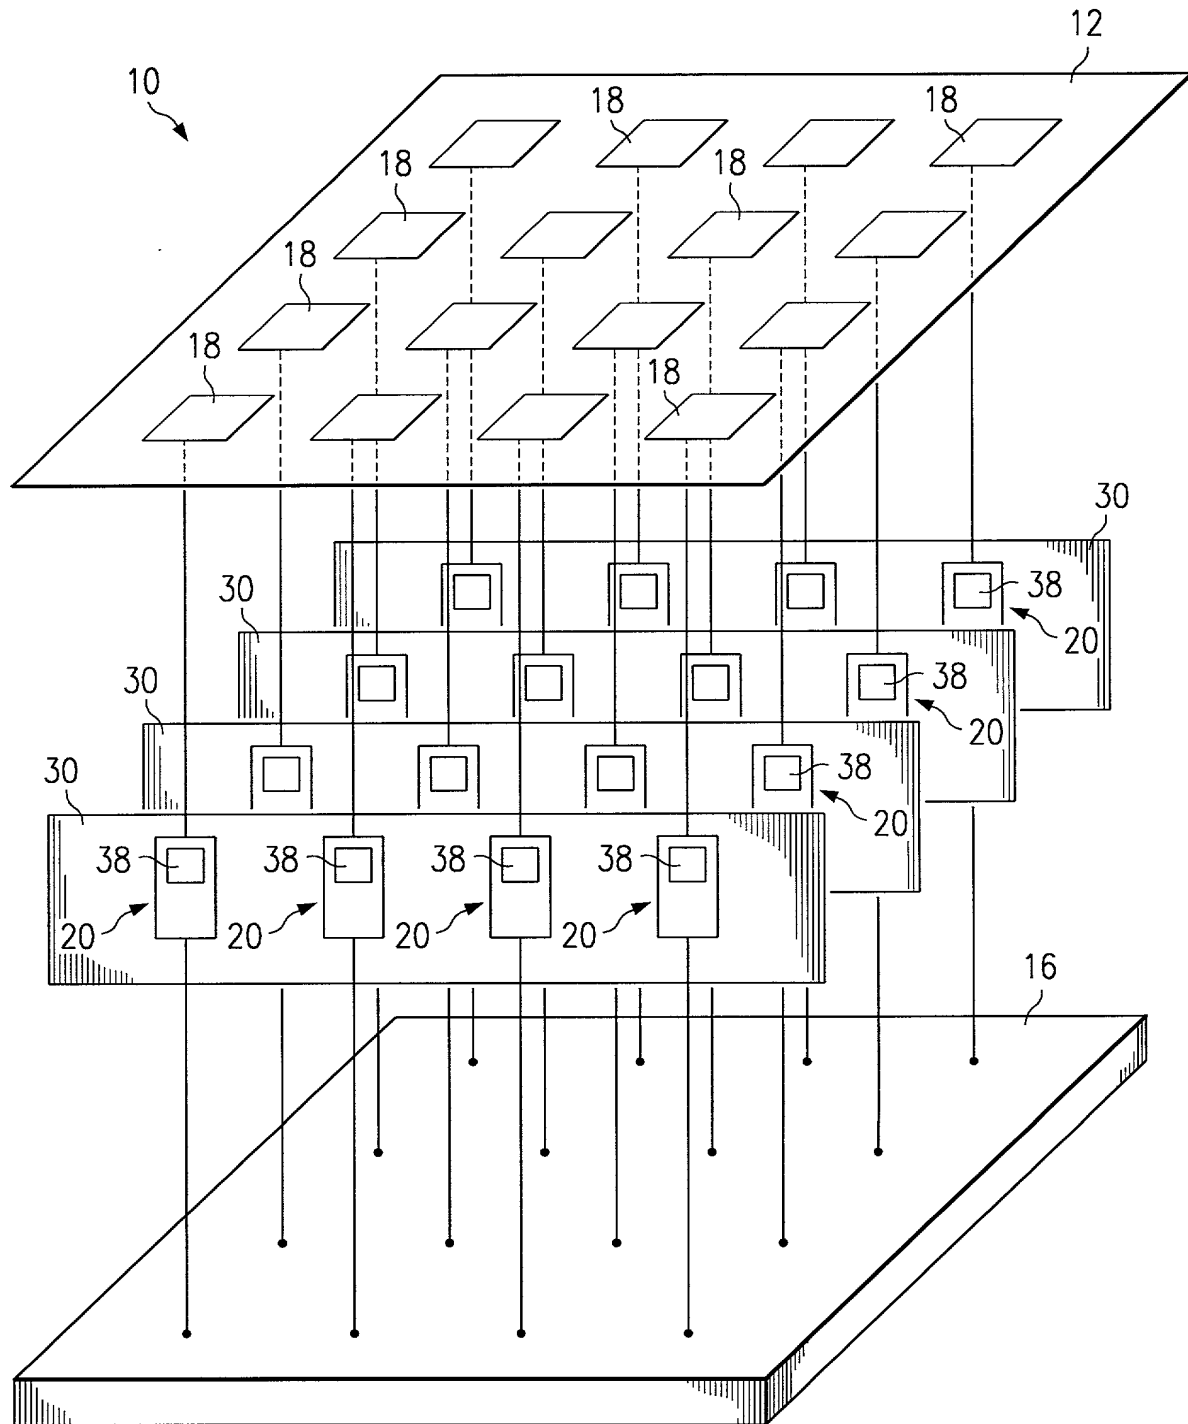
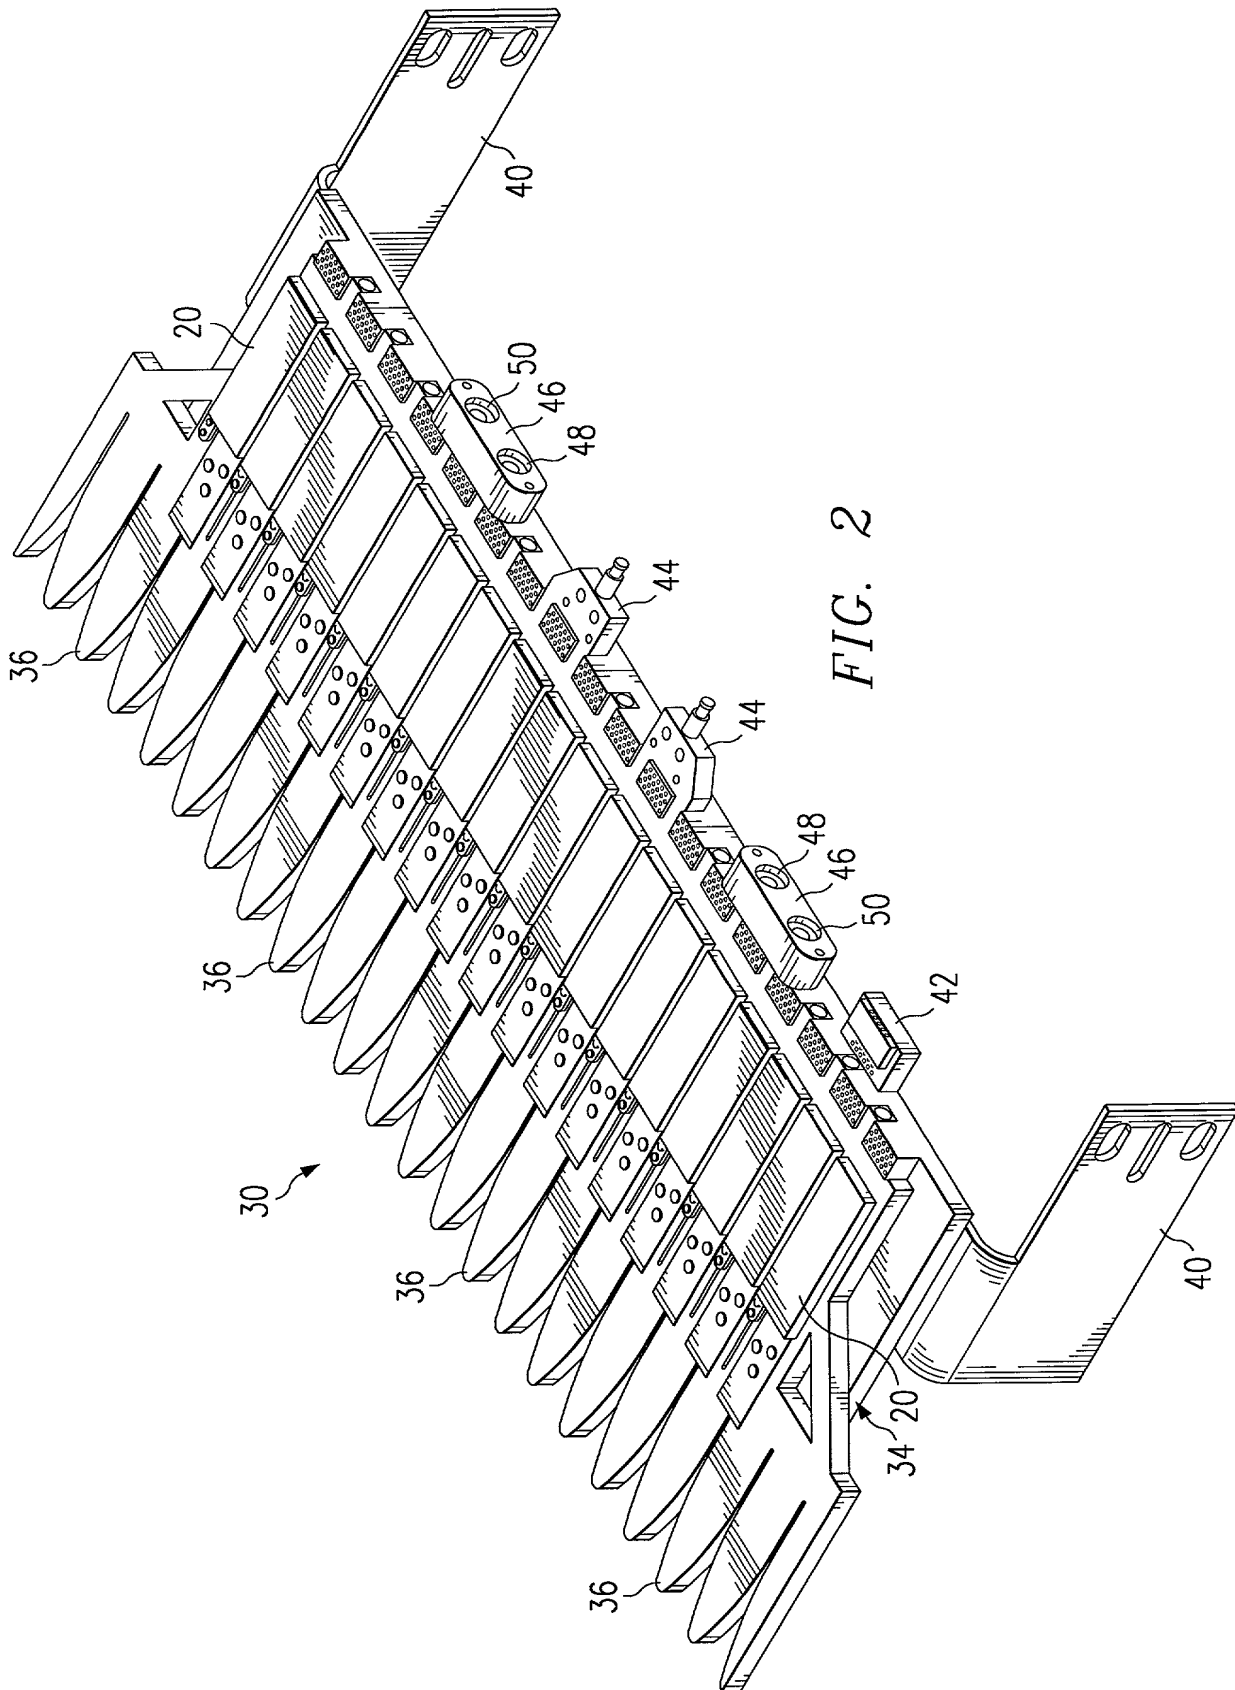


FIG. 1





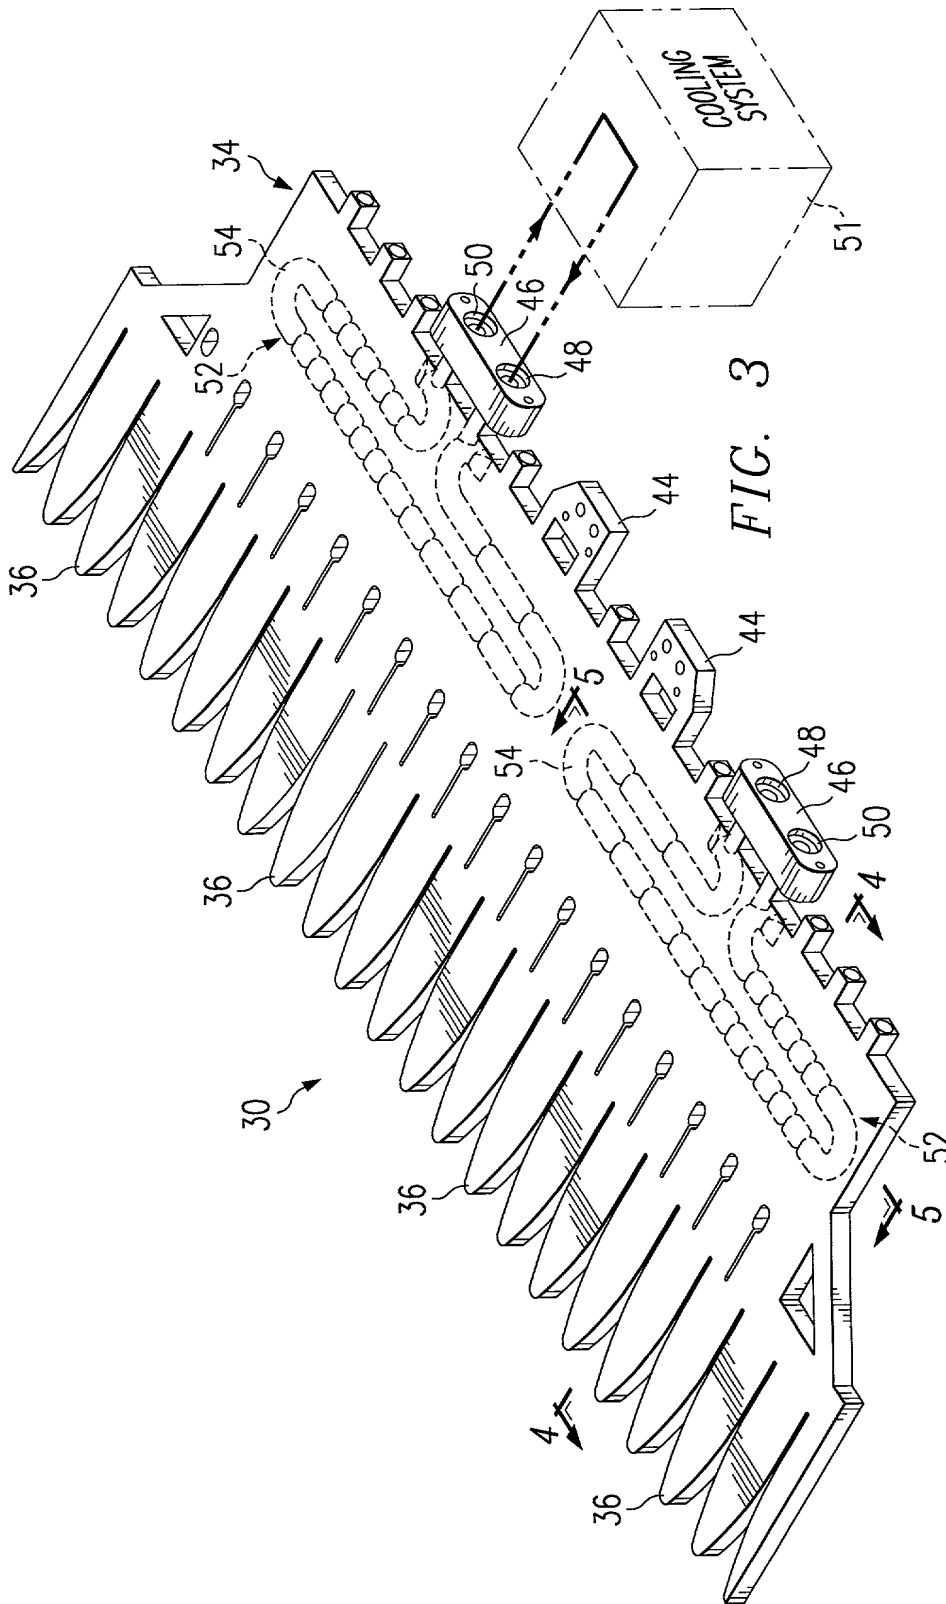


FIG. 3









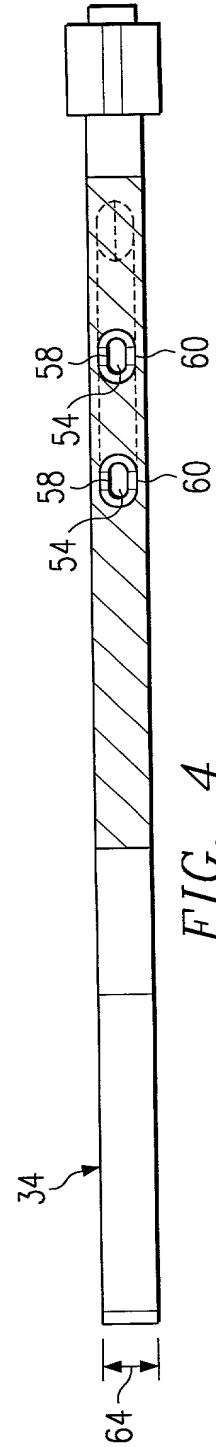


FIG. 4

FIG. 5 is a perspective view of the elongated member 34 showing the internal structure 62 and the external structure 66. The elongated member 34 is shown in a cross-sectional view, with the internal structure 62 and the external structure 66. The elongated member 34 is shown in a perspective view, with the internal structure 62 and the external structure 66. The elongated member 34 is shown in a perspective view, with the internal structure 62 and the external structure 66.

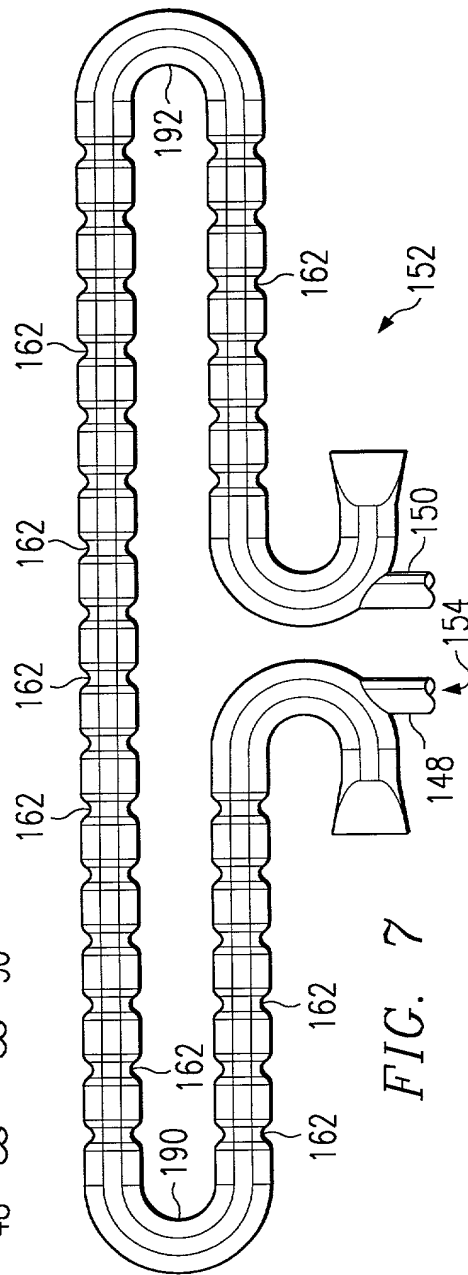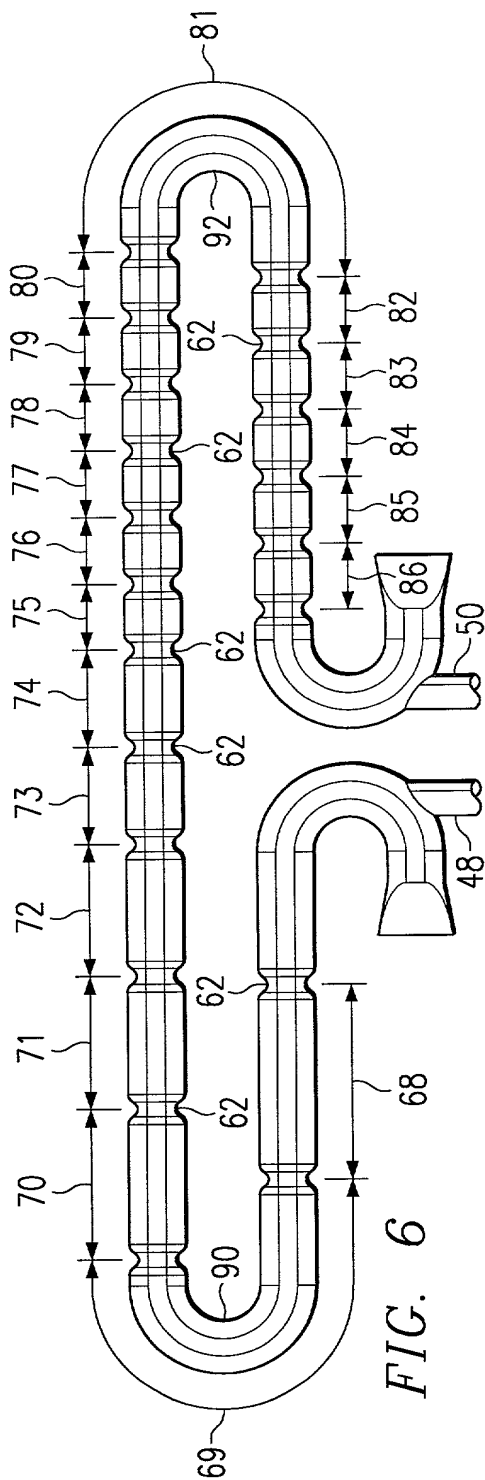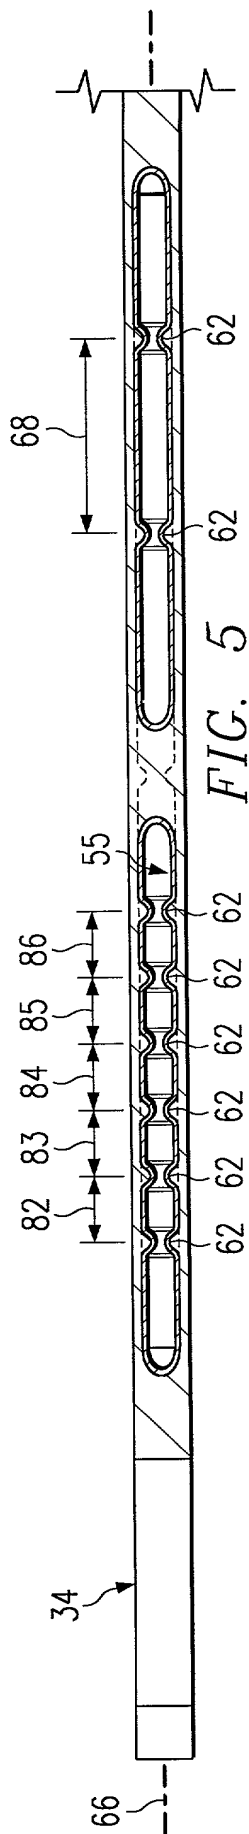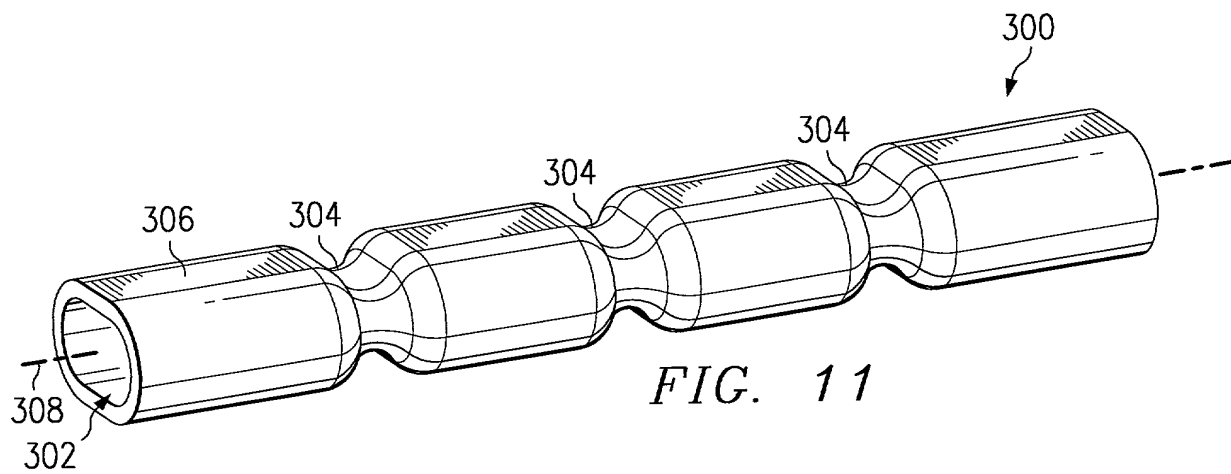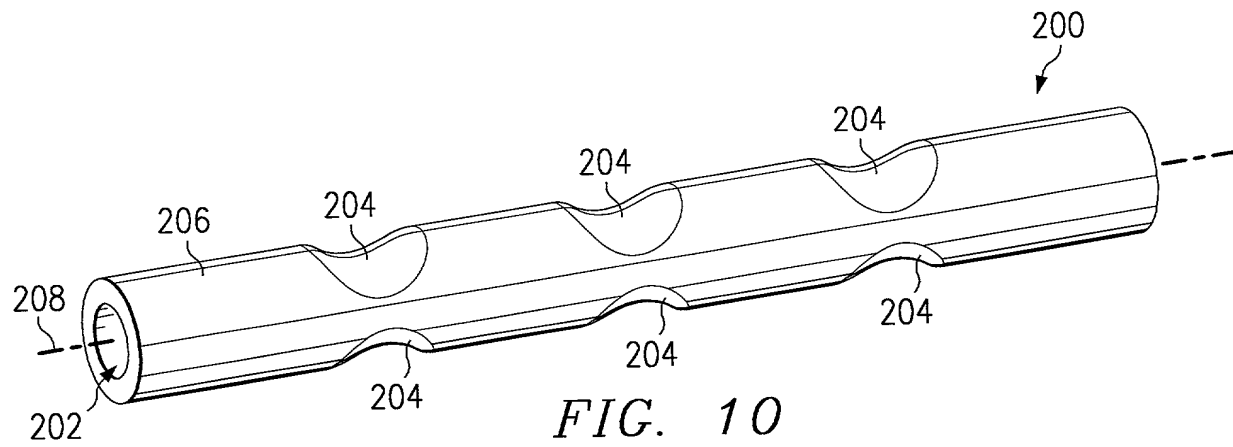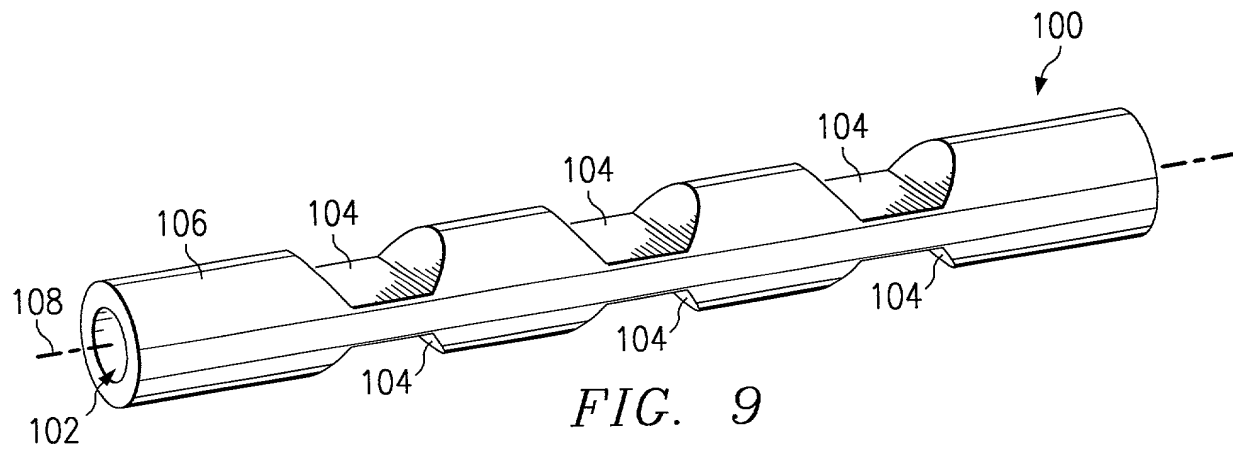

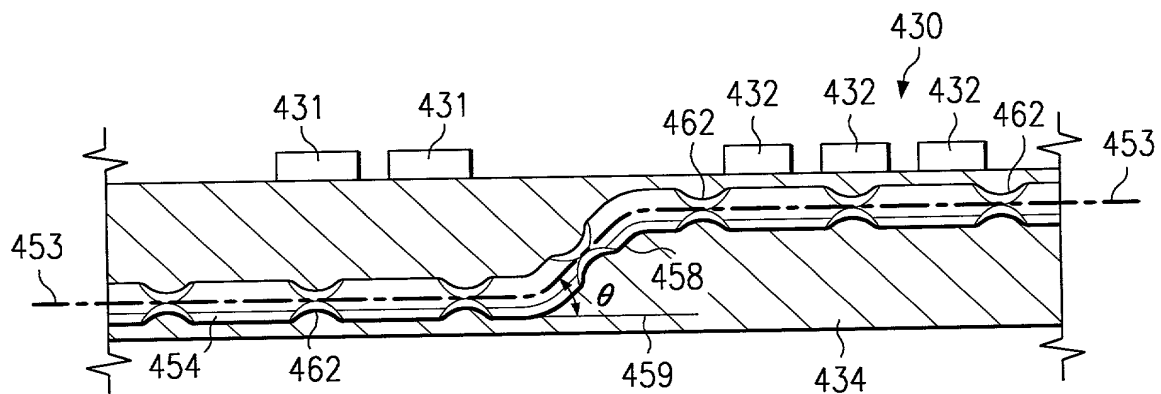

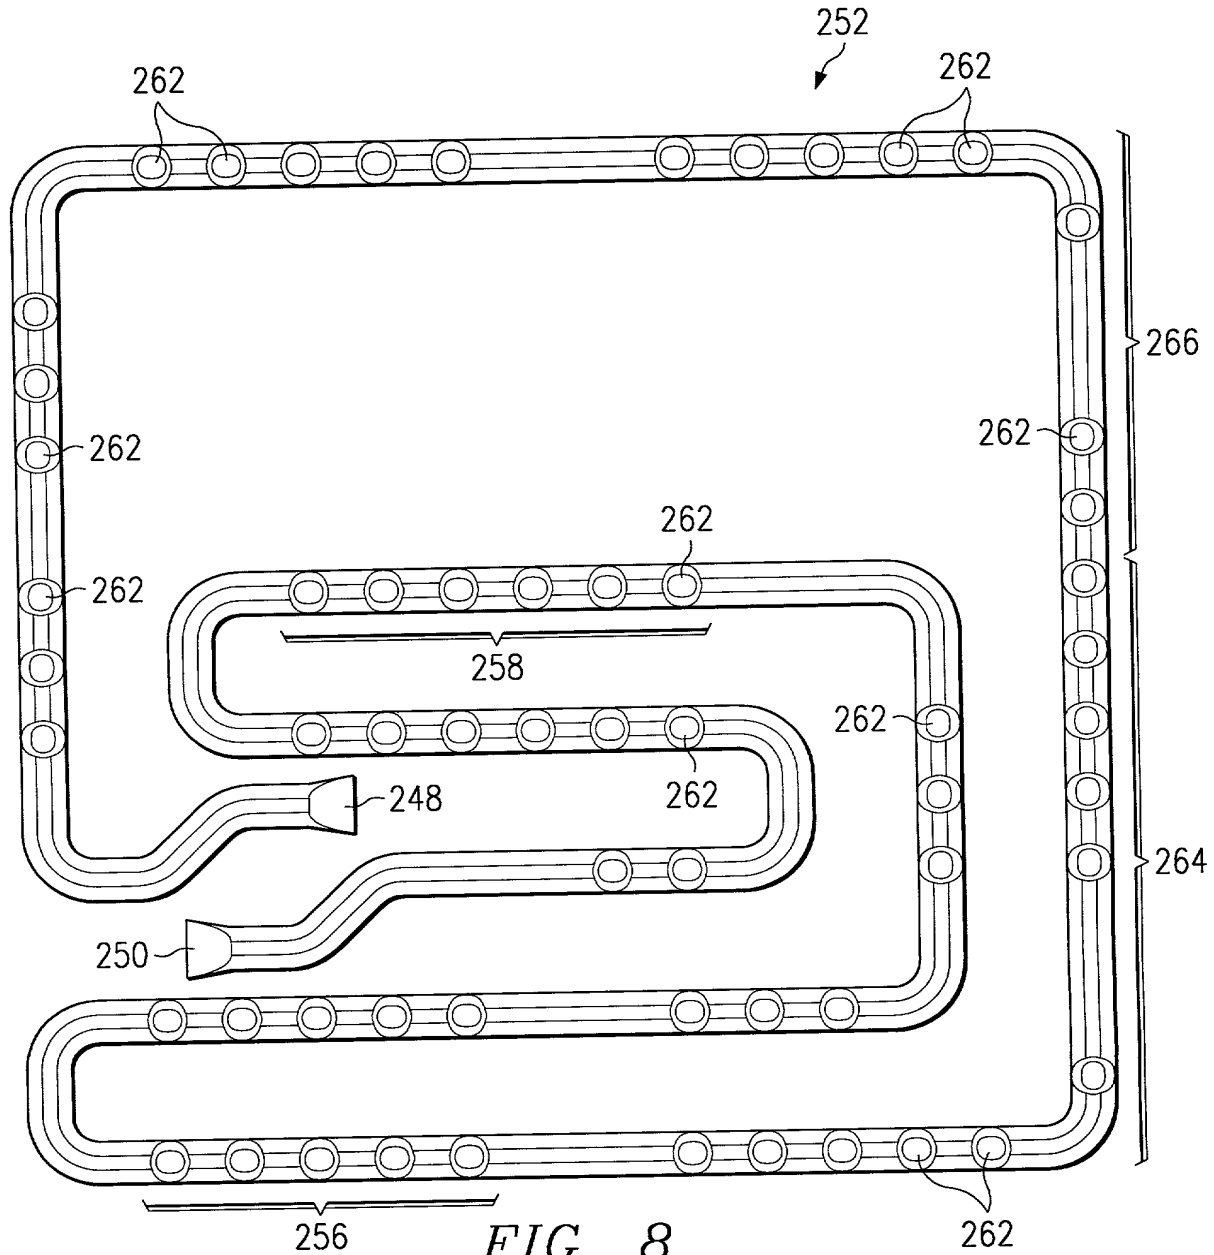

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD AND APPARATUS FOR TEMPERATURE GRADIENT CONTROL IN AN ELECTRONIC SYSTEM the specification of which (check one):

  X   is attached hereto; or

       was filed on        as Application Serial No.        and  
was amended on        (if applicable);

I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

| <u>Number</u> | <u>Country</u> | <u>Date<br/>Filed</u> | <u>Priority<br/>Claimed</u><br>(Yes) (No) |
|---------------|----------------|-----------------------|---|
| None          |                |                       |   |

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

| <u>Application</u><br><u>Serial Number</u> | <u>Date Filed</u> |
|--|-------------------|
| None                                       |                   |

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

| <u>Application</u><br><u>Serial Number</u> | <u>Date Filed</u> | <u>Status</u> (Patented, Pending, Abandoned) |
|--|-------------------|--|
| None                                       |                   |  |

I hereby appoint the following as my attorneys/agents with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities:

|                      |                 |
|----------------------|-----------------|
| René E. Grossman     | Reg. No. 22,656 |
| Glenn H. Lenzen, Jr. | Reg. No. 29,320 |
| Philip P. Berestecki | Reg. No. 26,502 |
| William C. Schubert  | Reg. No. 30,102 |
| Leonard A. Alkov     | Reg. No. 30,021 |
| Colin M. Raufer      | Reg. No. 40,781 |
| Robin R. Loporchio   | Reg. No. 40,071 |
| David L. Kinsinger   | Reg. No. 33,927 |
| John J. Snyder       | Reg. No. 39,380 |
| Steven T. Wernicki   | Reg. No. 39,416 |

all of Raytheon Company; and

|                           |                 |
|---------------------------|-----------------|
| Jerry W. Mills            | Reg. No. 23,005 |
| Robert M. Chiaviello, Jr. | Reg. No. 32,461 |
| Ann C. Livingston         | Reg. No. 32,479 |

Thomas R. Felger  
Charles S. Fish  
Kevin J. Meek  
T. Murray Smith  
Barton E. Showalter  
David G. Wille  
Bradley P. Williams  
Terry J. Stalford  
Christopher W. Kennerly  
Harold E. Meier  
Douglas M. Kubehl  
Samir A. Bhavsar  
Thomas R. Nesbitt, Jr.  
James J. Maune  
Roger J. Fulghum  
Scott F. Partridge  
James B. Arpin  
Jay B. Johnson  
Robert W. Holland  
Robert A. King  
James L. Baudino  
Tara D. Knapp  
David M. Doyle  
William R. Borchers  
Brian W. Oaks  
Luke K. Pedersen  
Matthew B. Talpis  
Keiko Ichiye  
Jeffery D. Baxter  
Thomas A. Beaton  
Kurt M. Pankratz  
Brian E. Szymczak  
Brian A. Dietzel  
Kevin R. Imes

Reg. No. 28,842  
Reg. No. 35,870  
Reg. No. 33,738  
Reg. No. 30,222  
Reg. No. 38,302  
Reg. No. 38,363  
Reg. No. 40,227  
Reg. No. 39,522  
Reg. No. 40,675  
Reg. No. 22,428  
Reg. No. 41,915  
Reg. No. 41,617  
Reg. No. 22,075  
Reg. No. 26,946  
Reg. No. 39,678  
Reg. No. 28,142  
Reg. No. 33,470  
Reg. No. 38,193  
Reg. No. 40,020  
Reg. No. 42,738  
Reg. No. 43,486  
Reg. No. 43,723  
Reg. No. 43,596  
Reg. No. 44,549  
Reg. No. 44,981  
Reg. No. 45,003  
Reg. No. 45,152  
Reg. No. 45,460  
Reg. No. 45,560  
Reg. No. P46,543  
Reg. No. P46,977  
Reg. No. P47,120  
Reg. No. 44,656 (Agent)  
Reg. No. 44,795 (Agent)

all of the firm of Baker Botts L.L.P.

Send Correspondence To:

Jerry W. Mills  
Baker Botts L.L.P.  
2001 Ross Avenue  
Dallas, Texas 75201-2980

Direct Telephone Calls To:

T. Murray Smith  
at (214) 953-6684  
Atty. Docket No. 004578.1073

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of the sole or first inventor

James S. Wilson

Inventor's signature

James S. Wilson  
9-12-2000

Date

Residence (City, County, State)

Hurst, Tarrant County, Texas 76054

Citizenship

United States of America

Post Office Address

524 Quail Cove  
Hurst, Tarrant County, Texas 76054



Full name of additional joint inventor, if any

Timothy C. Fletcher

Inventor's signature

Timothy C Fletcher

Date

9-12-00

Residence (City, County, State)

Garland, Dallas County, Texas 75040

Citizenship

United States of America

Post Office Address

2113 Woodglen Drive  
Garland, Dallas County, Texas 75040

004578.1073

Full name of additional joint inventor, if any

Lucian A. Brasier

Inventor's signature

Lucian A. Brasier

Date

9/12/00

Residence (City, County, State)

Plano, Collin County, Texas 75075

Citizenship

United States of America


Post Office Address

1709 Baffin Bay Drive  
Plano, Collin County, Texas 75075


Full name of additional joint inventor, if any

James S. Mason

Inventor's signature

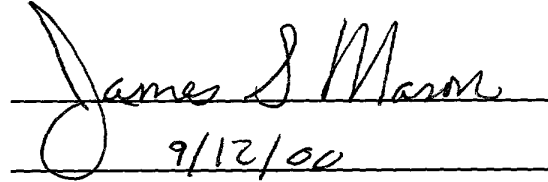  
James S. Mason

Date

  
9/12/00

Residence (City, County, State)

Richardson, Dallas County, Texas 75081

Citizenship

United States of America

Post Office Address

153 N. Spring Creek, Richardson, Dallas  
County, Texas 75081